



SHEERWEAVE | 2410 3%




P12 OYSTER




P13 OYSTER/ BEIGE




P14 OYSTER/ PEARL-GRAY

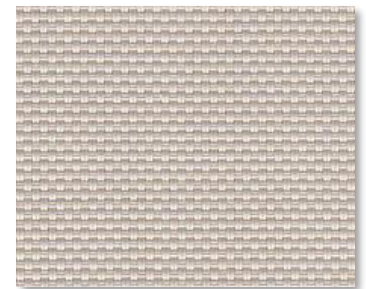

Q20 BEIGE



Q21 BEIGE/ PEARL-GRAY



V20 PEARL/ GRAY



V21 CHARCOAL




V22 CHARCOAL/ GRAY



V24 CHARCOAL/ CHESTNUT



V32 CHARCOAL/ ALPACA



P84 BRITE WHITE

SPECIFICATION

WIDTHS 63", 98" and 126"

ROLL LENGTH 30 Linear Yards

FABRIC WEIGHT 14.1 oz/yd²
FABRIC THICKNESS 0.020 in.

OPENNESS ~3%

UV BLOCKAGE ~97%

COMPOSITION 36% Fiberglass, 64% Vinyl on Fiberglass

ACCOUSTICAL VALUE NRC .20 / SAA .21

PRINTABLE Yes

FIRE CLASSIFICATION NFPA 701 TM#1 (small scale) TM#2 (large scale)
NFPA 101 (Class A Rating)
California U.S. Title 19 (small scale)
BS 5867 Part 2 Type B Performance
CAN/ULC-S 109 (large and small scale)
CAN/CGSB2-4.162-M80
IBC Section 803.1.1 (Class A Rating)

BACTERIA/ FUNGAL RESISTANCE ASTM E 2180 ASTM G21 AATCC30 Part 3 ASTM D 3273 ASTM G22 GREENGUARD Mold and Bacteria
Standard ASTM 6329 includes Microban antimicrobial additives

LEAD FREE RoHS/Directive 2002/95/EC REACH (EC 1907/2006) compliant ANSI/WCMA A 100.1-2007 for lead content
US Consumer Product Safety Commission Section 101

WARRANTY 10-Year (Interior), 5-Year (Exterior)
