


SHEERWEAVE | 2701 1% Dual Sided

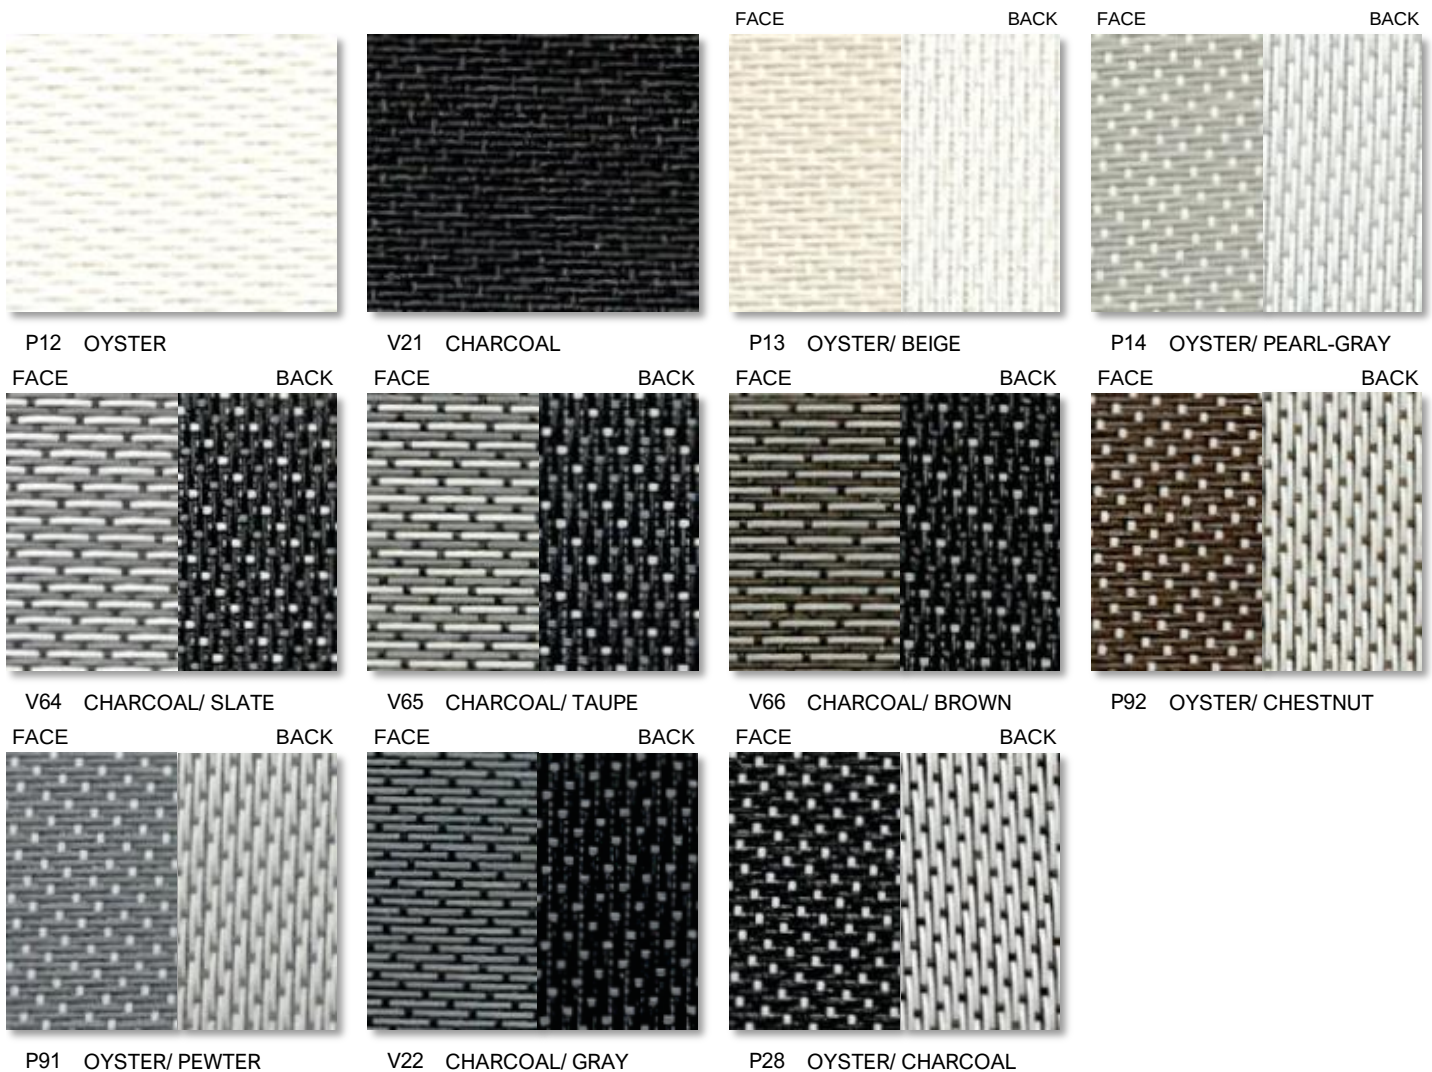

SPECIFICATION

WIDTHS 63", 98" and 126"

ROLL LENGTH 30 Linear Yards

FABRIC WEIGHT 14.6 oz/yd²

FABRIC THICKNESS 0.027 in.

OPENNESS ~1%

UV BLOCKAGE ~99%

COMPOSITION 36% Fiberglass, 64% Vinyl on Fiberglass

ACCOUSTICAL VALUE NRC .15 / SAA .15

PRINTABLE Yes

FIRE CLASSIFICATION NFPA 701 TM#1 (small scale) TM#2 (large scale)
 NFPA 101 (Class A Rating)
 California U.S. Title 19 (small scale)
 BS 5867 Part 2 Type B Performance
 CAN/ULC-S 109 (large and small scale)
 CAN/CGSB2-4.162-M80
 IBC Section 803.1.1 (Class A Rating)

BACTERIA/ FUNGAL RESISTANCE ASTM E 2180 ASTM G21 AATCC30 Part 3 ASTM D 3273 ASTM G22 GREENGUARD Mold and Bacteria
 Standard ASTM 6329 includes Microban antimicrobial additives

LEAD FREE RoHS/Directive 2002/95/EC REACH (EC 1907/2006)
 compliant ANSI/WCMA A 100.1-2007 for lead content
 US Consumer Product Safety Commission Section 101

WARRANTY 10-Year (Interior), 5-Year (Exterior)

