


SHEERWEAVE | 4901 1%

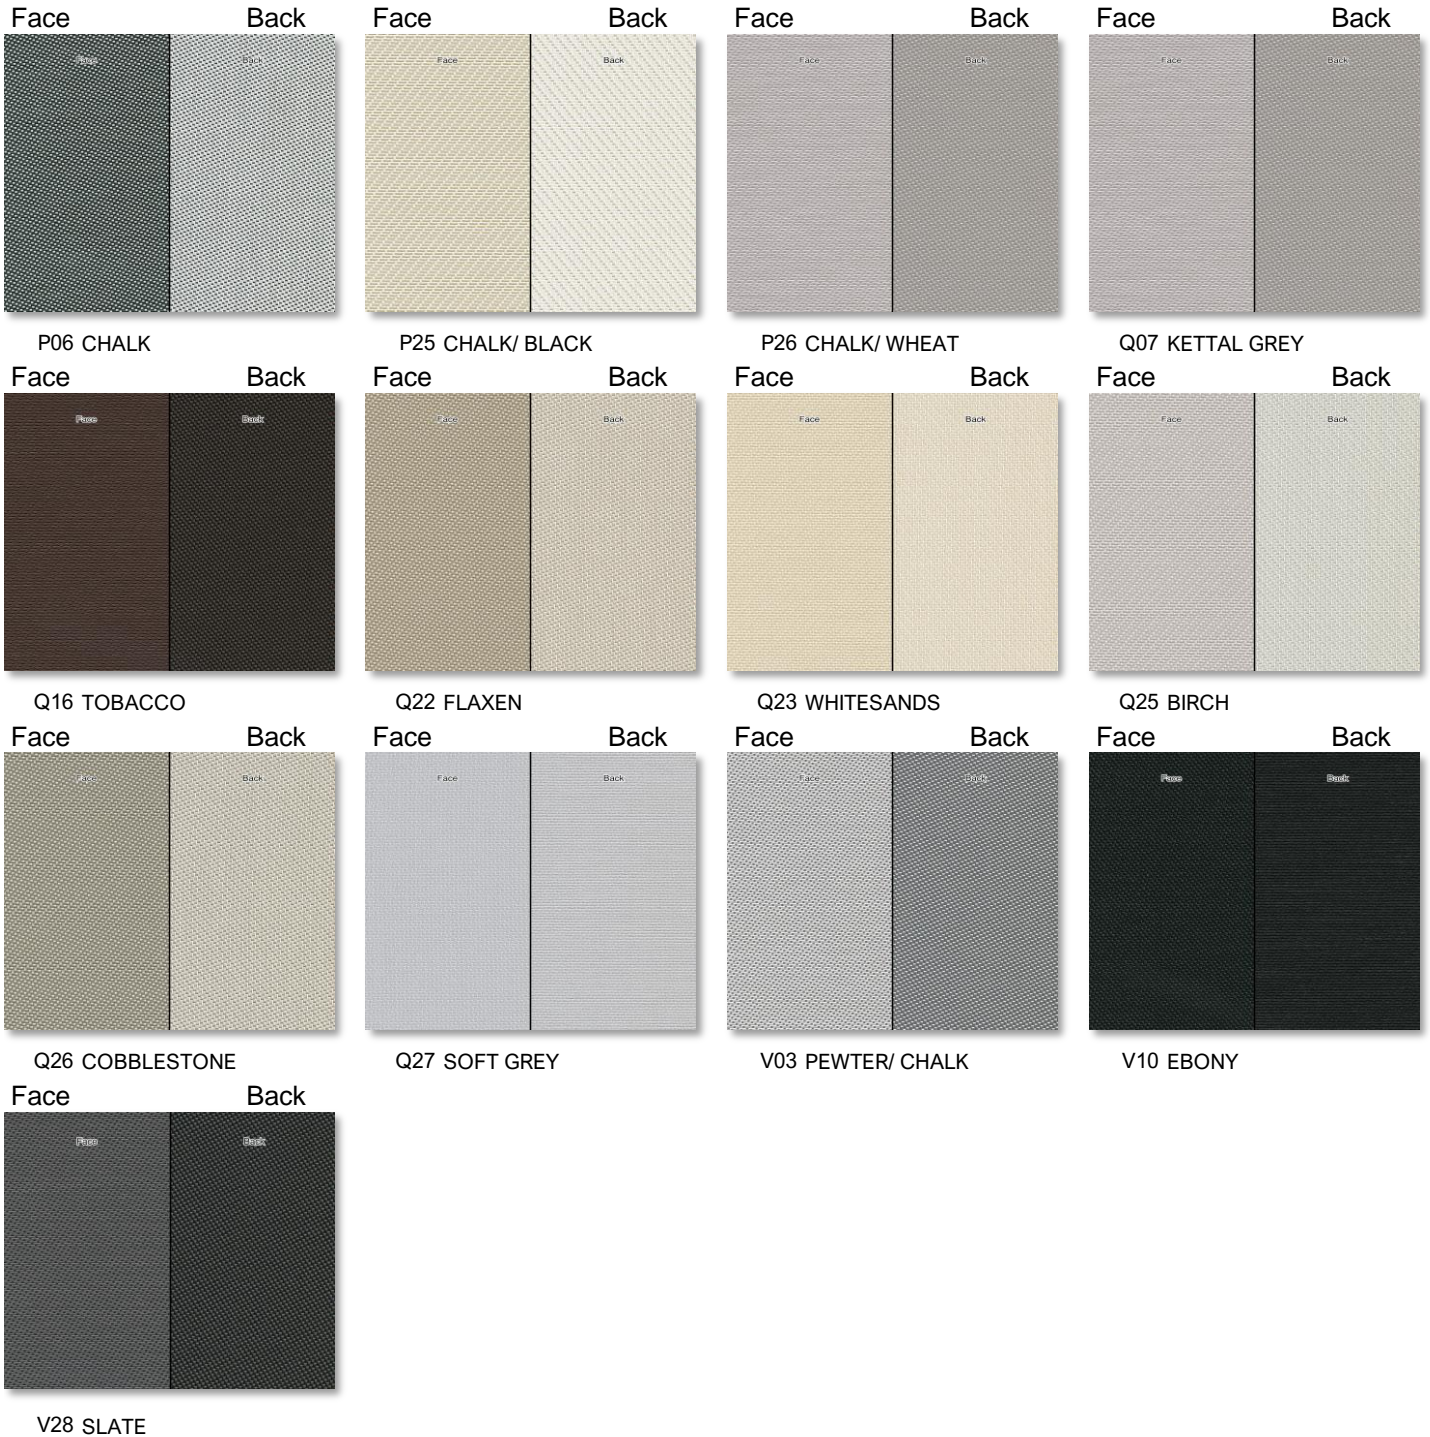

Care & Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.

SPECIFICATION

WIDTHS 63" and 98"	ENVIRONMENTAL BENEFITS	Certified to GREENGUARD and GREENGUARD Gold
ROLL LENGTH 30 Linear Yards	BACTERIAL AND RESISTANCE	ASTM E 2180, ASTM G21, ASTM G22, AATCC30 Part 3,
FABRIC WEIGHT 15.85 oz/yd ²	ACOUSTICAL PERFORMANCE	ASTM D 3273
FABRIC THICKNESS 0.028 in.	FIRE CLASSIFICATION	NRC:0.60, SAA: 0.59
OPENNESS ~1%		California U.S. Title 19 (small scale), NFPA 701 TM#1
UV BLOCKAGE ~99%		(small scale), NFPA 101 (Class A Rating), IBC Section
COMPOSITION 17% Polyester, 83% Vinyl on Polyester		803.1.1 (Class A Rating), BS 5867 Part 2 Type B
WARRANTY 5-Years Exterior, 10-Years Interior		Performance, NFPA 701 TM#2 (large scale), CAN/ ULC-
		S 109 (large and small scale), CAN/CGSB2-4. 162-M80



Care & Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.